



Compiled/Updated	LS
Approved	CD
Issued Date	07-09-2026
Amendment	A1

Instructions For Use - Bird Line Deterrent:

BIRDBLOCKA (REVO) and GRIP

Caution

- *This product is to be used by authorised industry trained personnel only.*
- *The use of this product must adhere to appropriate work practises and or industry standards ensuring compliance to all Workplace Health and Safety Regulations.*
- *This product may only be installed onto an asset when the asset owner has approved of such installation.*
- *Failure to follow appropriate work practices and operational instructions or modifications to this equipment can result in product damage and or serious injury.*
- *These instructions are to be read in conjunction with The Product Data Sheet (PDS) as well as Balmoral Engineering terms and conditions published on our website.*


1. General Spacing and Orientation Recommendations

The BIRDBLOCKA (REVO) and GRIP are designed to be used on 5mm² -240mm² CSA cables only. Balmoral cannot confirm the proper operation of the product on cables that do not conform to these requirements.

The BIRDBLOCKA (REVO) is recommended to be single use due to the secure clip closure. Un-installing the BIRDBLOCKA (REVO) for reinstallation can damage the product and jeopardise the integrity of the product.

From a single installation point a maximum of 30 BIRDBLOCKA (REVO) can be connected. A GRIP must be used Maximum every 30 BIRDBLOCKAs to enable the product to swivel freely.

This recommendation is subject to the requirements of the asset owner and dependent on environmental conditions.

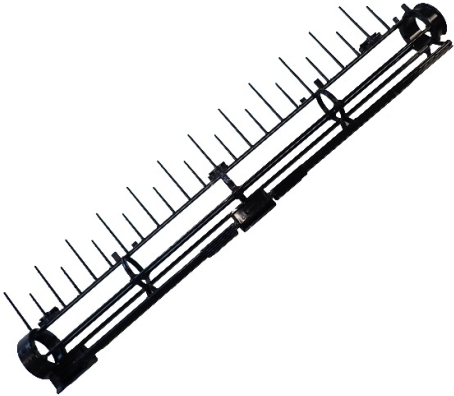Products	BIRDBLOCKA (REVO)	GRIP
Part No.	BB-BL-1	GRIP-BL
Suits Cable Size	OD Ø 5mm - Ø 26mm	OD Ø 5mm - Ø 26mm
Images		


For more product information please visit our website: balmoralengineering.com

Page 1 of 4



Compiled/Updated	LS
Approved	CD
Issued Date	07-09-2026
Amendment	A1

2. In- Use Instructions



Scan the QR code

Or


[Click here to watch the video.](#)

A0: Preparation

A0.1

Before installing, make sure all BIRDBLOCKAs are open, and ready to install.


DO NOT press to lock the clips before installing on cables.

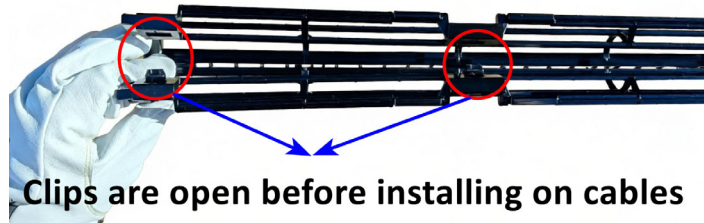

A0.2

Make sure the GRIP is open, and the clip is retained on the blocker.

DO NOT turn to lock or loosen the GRIP before installing on cables.

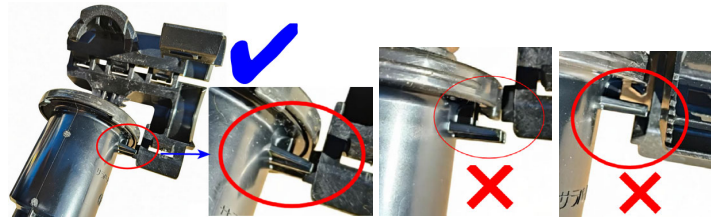


A1: Fitting the BIRDBLOCKA (REVO) on the powerlines

A1.1


Hold the middle section of the BIRDBLOCKA (REVO) and hang it over the powerline.

If there is a high and low point of the cable in the intended installation zone. Start installation from the lowest point of the cable. In the final step, the **GRIP** will be installed in this same location to lock the run of BIRDBLOCKAs in place.

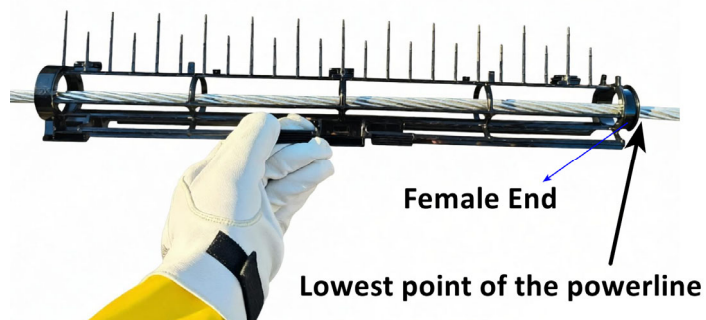




A1.2

Press the two clips to lock the BIRDBLOCKA (REVO).

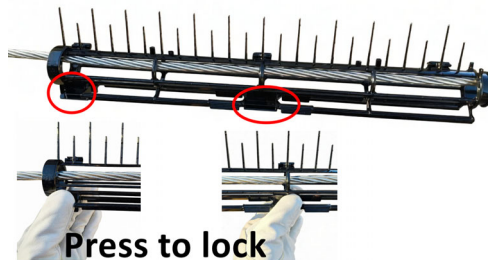




Compiled/Updated	LS
Approved	CD
Issued Date	07-09-2026
Amendment	A1

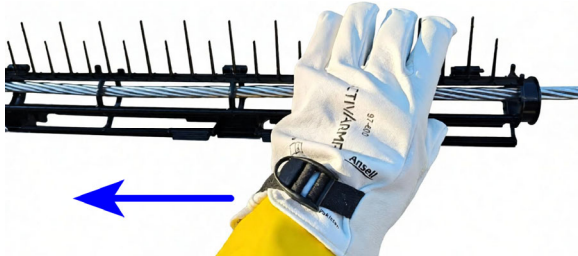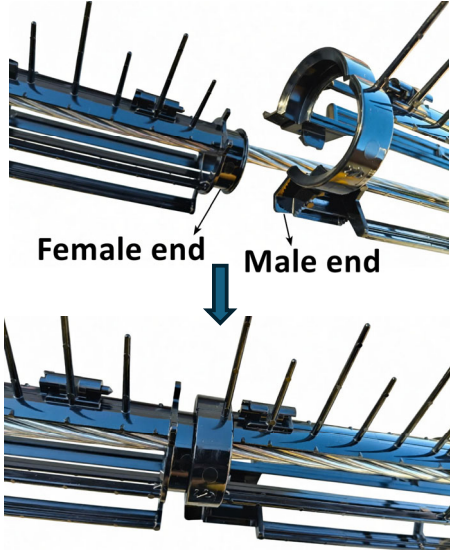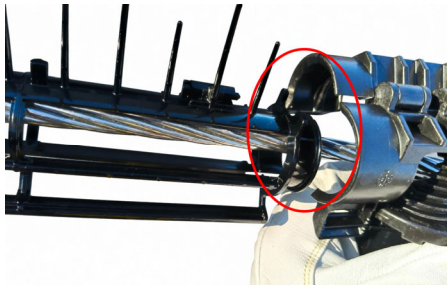A1.3	Slide the first locked BIRDBLOCKA (REVO) in the direction of intended installation.	
A1.4	Place the next BIRDBLOCKA (REVO) onto the powerline by engaging the male end over the female end of the already installed unit.	
A1.5	Repeat A1.2 to A1.4 to install as many BIRDBLOCKA (REVO) as required or the space allows.	
A2: Fitting the GRIP		
A2.1	Place the GRIP on top of the last BIRDBLOCKA (REVO) by covering its female end.	
A2.2	Press the GRIP clip to lock it on the BIRDBLOCKA (REVO).	



Compiled/Updated	LS
Approved	CD
Issued Date	07-09-2026
Amendment	A1

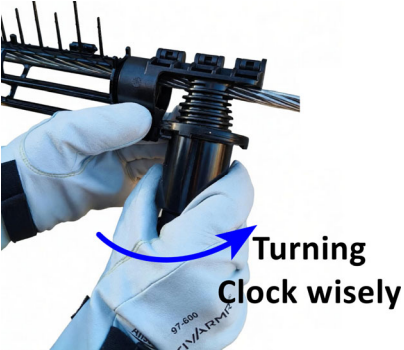A2.3	Lock the GRIP to the powerline by turning its handle clock wisely. Note: The initial couple of turns will need additional pressure to release the clip from the blocker of the Grip.	
A2.4	Complete the installation	

3. In - Service Care

- 1) It is desirable that BIRDBLOCKAs and GRIPs are stored in a stable room temperature environment away from sharp objects, sunlight, ozone and steam. Kept clear of oil-based products and hydrocarbon derivatives.
- 2) All BIRDBLOCKAs and GRIPs should be visually inspected for any defects. Any item found to be defective should be removed. Recommended cleaning the products using either a mild detergent or Polywater®.