


Compiled/Updated	LL
Approved	CD
Issued Date	5-6-26
Amendment	A3

Product Data Sheet - Street Light Column Kits

Kits designed to provide shrouding around the opening of street light columns to help protect electrical workers during live works.

Key Features:

- Yellow/grey PVC conforms with AS 4202 with a 650v electrical rating.
- Black mats (if included), conform with IEC 61111 with a 1000v electrical rating.
- PVC comes as a dual layer yellow/grey visual indicator of wear.
- Clear PETG inserts conform to shape of column.
- PVC excels as a durable, hard wearing and easier to clean material.
- PVC comes with magnetic fasteners to easily snap onto steel columns.
- Comes as a convenient kit, with a bag for easy transport.
- Provides brush contact protection up to 650v.
- Can be used during maintenance, or for longer term installations.

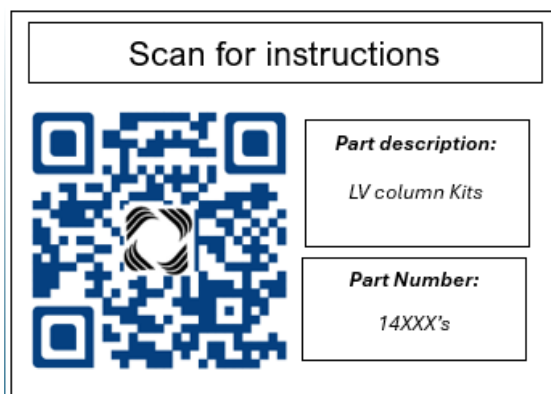



Compiled/Updated	LL
Approved	CD
Issued Date	5-6-26
Amendment	A3

Part No. Table (A)

Component	Description	Kit Item Numbers		
		14001	14002	14003
1810-1	CL0 GRND Mat 1000V 1mx1mx6mm Blck EPDM Cut Out	X	1 EA	X
23002	LV Column Cover-500x290-Magents-PVC-Y/G-650V	1 Pair	1 Pair	1 Pair
25006	Velcro Strap-1mx50mm-Nylon-Black	X	2 EA	X
26031	Kit Bag-1.1x250x130-window/base-Yel-PVC-Zip	X	1 EA	X
INS-L	Large Insert-590x150x1.5-Plain-PETG-Clear	1 Pair	1 Pair	X
INS-S	Small Insert-390x150x1.5-Plain-PETG-Clear	1 Pair	1 Pair	1 Pair
26004	Kit Bag-600x400-PVC-Yellow-Velcro	1 EA	X	1 EA

Dimensions Table (B)

Product	Length	Width	Thickness	Material	Class
1810-1	1000mm	1000mm	6mm	Ethylene-Propylene-Diene-Monomer Rubber (EPDM Rubber)	Class 0 IEC61111
23002	500mm	300mm	2mm	Yellow / Grey Dual layer Polyvinyl-Chloride (PVC)	CLASS II AS4202
25006	1000mm	50mm	0.5mm	Black Nylon	N/A
26031	1100mm	250mm	130mm	Yellow Polyvinyl-Chloride (PVC)	N/A
INS-L	590mm	150mm	1.5mm	Clear PETG	LV Only
INS-S	390mm	150mm	1.5mm	Clear PETG	LV Only
26004	600mm	400mm	0.5mm	Yellow Polyvinyl-Chloride (PVC)	N/A

Compiled/Updated	LL
Approved	CD
Issued Date	5-6-26
Amendment	A3

Markings Table (C)

1810-1	Barcode, Electrical Rating, IEC Standard, Date of Manufacture, Lot Number, Test Date
23002	Standard the unit follows, Class, Voltage Rating, Date of Manufacture, Lot Number, Item Code
25006	N/A
26031	N/A
INS-L	"LV ONLY", Date of Manufacturer, Lot Number, Item Code
INS-S	"LV ONLY", Date of Manufacturer, Lot Number, Item Code
26004	N/A

Ratings Table (D)

1	AS4202 Standard	23002 - Compliant ^(a)	2	IEC 61111 Standard	1810-1 - Electrically Compliant ^(a)
---	-----------------	----------------------------------	---	--------------------	--

(a) Results obtained from a material data sheet

Disclaimer: BALMORAL ENGINEERING, ROTAMARKA, TIGER TAILS and BIRDFLAPPA are trademarks owned by Balmoral Engineering Pty Ltd. The information in this document or product specification is believed to be correct as of the date of issue and is subject to change without notice. This document should be read in conjunction with the applicable Instructions For Use (IFU) document. Data within Balmoral Engineering Product Data Sheet (PDS) may be subject to tolerances. These tolerances will be defined within the applicable PDS or made available on request. Results and output data in this data sheet are indicative of lab testing protocols and may vary in field applications or environments. BALMORAL ENGINEERING makes no guarantees, expressed or implied as to the merchantability or fitness for purpose. The products are only to be used and installed by industry certified personnel. If applicable, maximum test speeds should be endured by the Products for a limited time period no greater than those described in the lab protocols. Imperial system units of measure are approximations only and have been converted from the data originally recorded in the metric system. Performance of the device in extreme weather events or harsh environments is not warranted. If BALMORAL ENGINEERING sells any component of a product or kit, we make no representations or guarantees as to the serviceability of the actual product or kit into which the component is being added. Furthermore, it is recommended that any such addition to the kit is done by BALMORAL ENGINEERING. In relation to the Balmoral Engineering Visual Warning series of products, it should be noted that not all visual responses to the device are going to be similar or alike. As such, no guarantees can be given as to the products effectiveness. Given the variety of factors that can affect the use and application of a product, some of which are within the user's knowledge and control, it is essential that the user evaluate the product to determine whether it is fit for a particular purpose and suitable for the user's method of use or application. The purpose of this document is to provide a description of the product and/or guidance to the installation thereof. When installing Balmoral Engineering products, due consideration must be given to the user's training and practice methodologies including any requirements of the entity who owns the infrastructure onto which the BALMORAL ENGINEERING Product is being installed. This must take precedence over any guidance BALMORAL ENGINEERING may provide. Notwithstanding, that all the above guidelines are followed, the ultimate responsibility for installing and maintaining the product correctly is with the end user. BALMORAL ENGINEERING accepts no liability for consequential damage relating to wildfires or bushfires particularly in regard to incorrect installation. As service environments may differ markedly with each application, the level of care required may change and is solely the responsibility of the end user. Any product images displayed are representative only. The above data sheet is provided as an estimate of performance and life and is not a guarantee or warranty. © 2026, All Rights Reserved, Balmoral Engineering Pty Ltd.